### HYDROLOGICAL MODELING OF PREVATT LAKE, ORANGE COUNTY, FLORIDA

By: Shiblu Sarker, Ph.D., P.E. Awes Karama, Ph.D. Tom Jobes Holli N. Capps Herron

St. Johns River Water Management District Palatka, Florida

2023



# **EXECUTIVE SUMMARY**

The St. Johns River Water Management District (SJRWMD) has been working to establish Minimum Flows and Levels (MFLs) for Prevatt Lake. The MFL program designates the minimum hydrologic conditions that must be maintained for the lake to prevent significant harm to water resources and ecosystem services resulting from permitted water withdrawals. In support of the MFLs program, SJRWMD developed a Hydrological Simulation Program - FORTRAN (HSPF) model to simulate the hydrologic and hydraulic processes, surface water – groundwater interaction, and water budget components of Prevatt Lake and its watershed.

Using the existing available hydro-meteorological and geospatial data, the HSPF model was set up for the period from 1995 to 2020. The model was calibrated and validated for the periods 2008 to 2020 and 1995 to 2007, respectively. Model performance was evaluated with common graphical methods and statistical metrics used by SJRWMD. Once successfully calibrated and validated, the model was extended to the period from 1953 to 2020 for long-term simulations.

The HSPF model reasonably simulated the temporal variations and magnitudes of observed stages for Prevatt Lake during both the calibration and validation periods. Most importantly, the model adequately replicated the observed low to medium stages of Prevatt Lake, which are crucial for MFLs modeling and assessment processes. Some discrepancies between the long-term observed and simulated stages are noticed; however, this decrease in performance in the earlier years could be attributed to the lack of long-term observed groundwater and rainfall data within the watershed, as well as land use/land cover changes in the watershed due to urban development, as were apparent in a comparison of historic aerial photos. Sensitivity analysis found that the lakebed leakance and the lower zone evapotranspiration parameter are the most sensitive parameters for the model. Overall, the HSPF model showed reasonable simulations of hydrologic and surface water - groundwater interaction processes of the lake. Therefore, it is concluded that the model can be used for MFLs modeling and scenarios analysis.

# **EXISTING DATA REVIEW**

Prevatt Lake is located in the Wekiva River Watershed, within Orange County, Florida. It lies two miles north of the City of Apopka in Wekiwa Springs State Park. It has a surface area of approximately 100 acres, and discharges via Carpenter Branch and Mills Creek into Rock Springs Run. The location of the lake and its watershed (see Watershed Delineation section) are shown in Figure 1.

SJRWMD obtained and reviewed the following available data to set up the HSPF model for the Prevatt Lake watershed:

- Rainfall and potential evapotranspiration (PET) data
- Observed groundwater levels
- Observed lake levels
- Geospatial data such as digital elevation model (DEM), lake bathymetry, land use/land cover (LULC), and soils

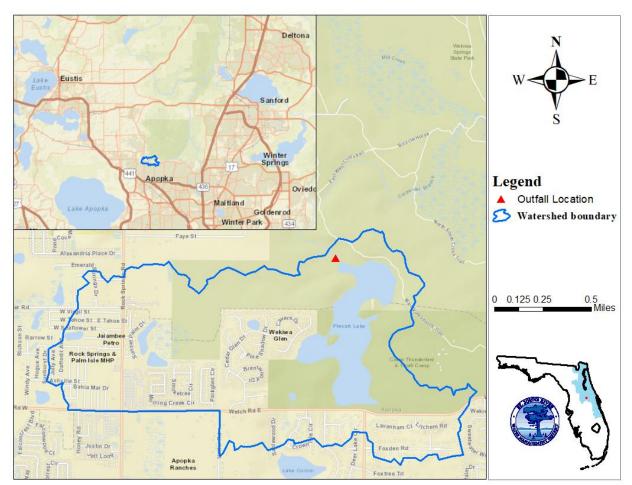


Figure 1. Prevatt Lake and its watershed

# **Meteorological Data**

SJRWMD reviewed several meteorological stations and Next Generation Weather Radar (NEXRAD) pixels for rainfall data. Figure 2**Error! Reference source not found.** shows the station locations from this review. The area-weighted average of NEXRAD data was determined to provide the most accurate source for rainfall within the Prevatt watershed. Therefore, we have used this as the source of rainfall data for the model calibration.

However, the long-term simulation required available data dating back to the early 1950s, but NEXRAD records only begin in 1995. Therefore Isle-Win, the closest rainfall station, was used to extend the long-term rainfall record back to 1953. The closest available PET station was Lisbon, which was used for both the calibration and long-term simulation models. Figure 3 shows annual totals for the meteorological data used, and summary statistics for each source is shown in Table 1. Summary of Rainfall and PET time series data.

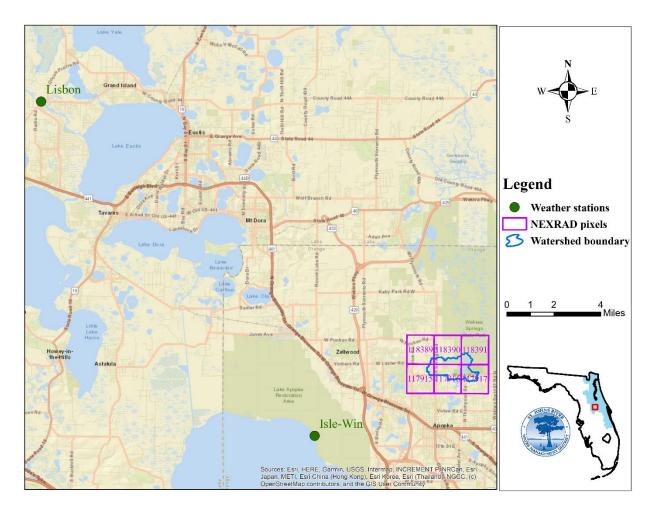


Figure 2. NEXRAD pixels and weather station locations for Prevatt Lake

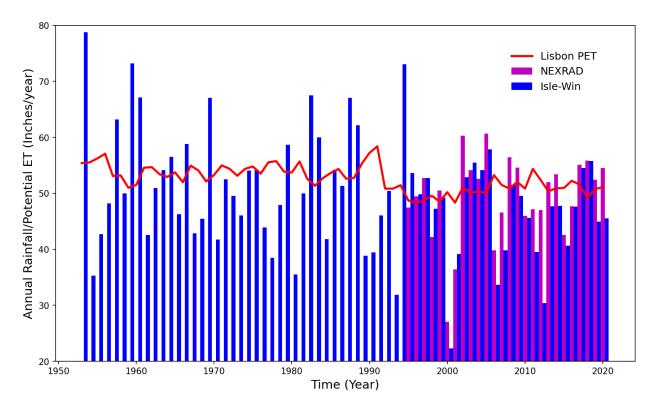


Figure 3. Annual rainfall for Isle-Win and NEXRAD, and annual PET for Lisbon


	NEXRAD	Isle-Win	Lisbon PET
Minimum (inches/year)	27.04	22.28	48.34
Maximum (inches/year)	60.63	78.78	58.39
Mean (inches/year)	49.41	49.83	52.63
Start date	1995-01-03	1953-01-01	1953-01-01
End date	2020-12-31	2020-12-31	2020-12-31

Table 1. Summary of Rainfall and PET time series data

# **Groundwater Level Data**

Groundwater level data is needed to set a boundary condition for the loss of water from the lake to the Upper Floridan Aquifer (UFA). The suitability of three nearby UFA wells was evaluated. Figure 4 shows their locations. Well OR0893 is located inside the watershed and therefore was used for its available period of record, from 1/1/2009 to 12/30/2020. For extending the record back further, the Line of Organic Correlation method (Helsel & Hirsch, 2002) was used to determine correlations between this well and the other two more distant ones. The record for the next closest well OR0548 went back to 11/19/1992. For the long-term simulation, it was necessary to use the furthest well S-0125.

OR0548 had a good correlation with OR0893, with a coefficient of determination ( $R^2$ ) of 0.70. S-0125 had a reasonable correlation with OR0893, with an  $R^2$  of 0.48. Figure 5 shows scatter plots, LOC equations, and  $R^2$  values for each secondary well. Figure 6 shows the UFA groundwater levels for the individual wells and the final extended data set. Note that all elevation data in this report, whether

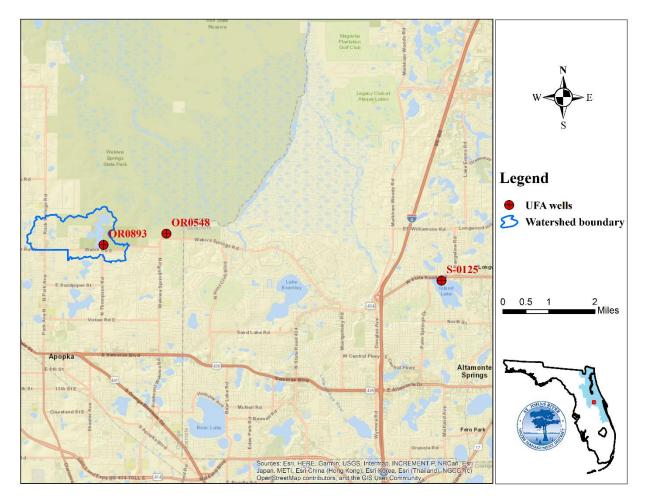

groundwater (GW) levels, lake levels, or topography, are in feet above the North American Vertical Datum (NAVD), 1988.

Figure 4. Locations of UFA wells

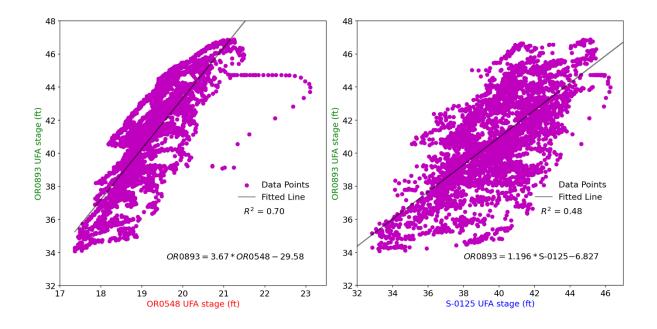


Figure 5. Correlation between observed UFA groundwater levels

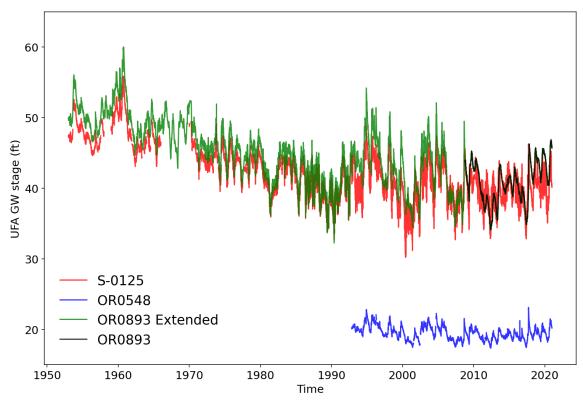


Figure 6. Observed and extended UFA groundwater levels

### **Observed Stage Data**

There is an existing stage recorder with a good record on the north shore of Prevatt Lake (SJRWMD 15470818). However, at low stage the lake divides into two separate north and south lobes, potentially with different stages. Therefore, an additional station (SJRWMD 15472917) was added to collect stage data in the South Lobe in 2022. Because this record is so short, it was extended by using the LOC method to develop a relationship between it and the data from a nearby surficial aquifer well (OR0894). The locations of the stage recorders and the surficial aquifer well are shown in Figure 7, and the water level records are shown in Figure 8.

Figure 9 shows the scatter plots, and  $R^2$  values for the stage in both lobes versus the well water levels. A near perfect correlation ( $R^2 = 0.99$ ) was observed between the surficial aquifer and South Lobe. This is expected since the well is very close to the South Lobe data collection location. The resulting LOC equation used for extension is also shown. The North Lobe correlation was lower but still good at 0.72; but this was not needed to extend data for the model, so no LOC was performed.

The resulting extended South Lobe timeseries was generally lower than the North Lobe data, even at North Lobe stages above 51 ft, where the two should be connected. The difference in average stage was generally about 1 foot. Therefore, we further adjusted the overall extended South Lobe data upward by 1 ft. The North Lobe stage and the extension of the South Lobe stage, before and after adjustment, are shown in Figure 10.

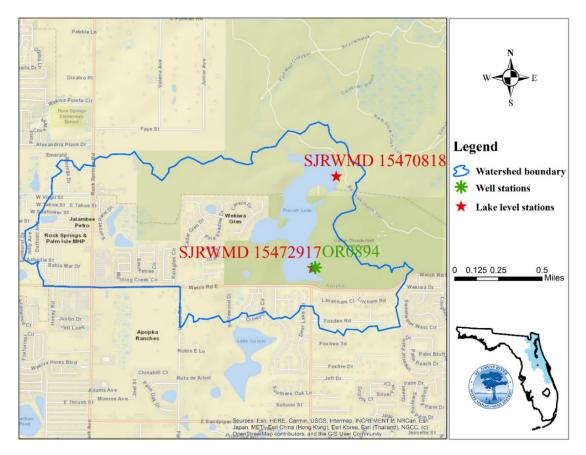


Figure 7. Stage recorders and surficial aquifer well locations

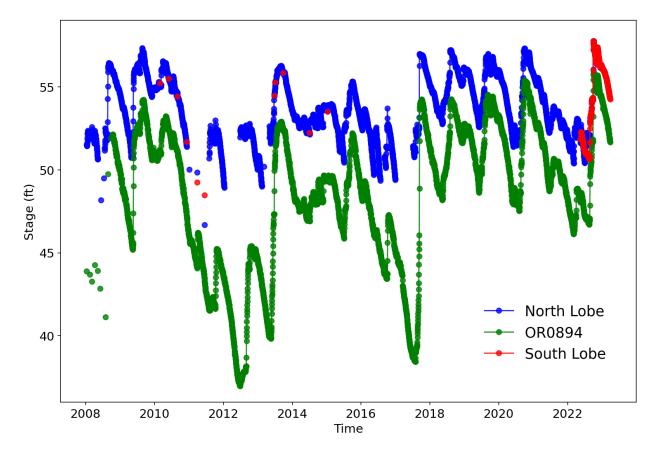


Figure 8. Observed North Lobe, South Lobe and surficial aquifer water levels

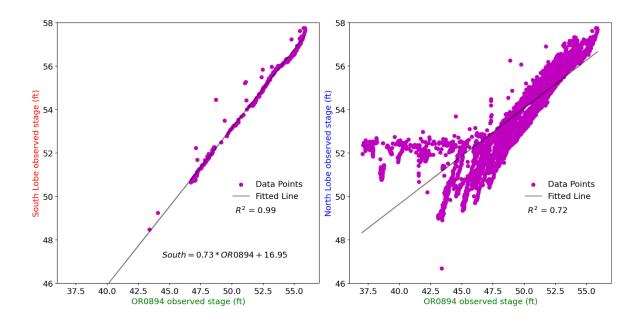


Figure 9. Correlation between South Lobe and North Lobe stages with surficial aquifer water level

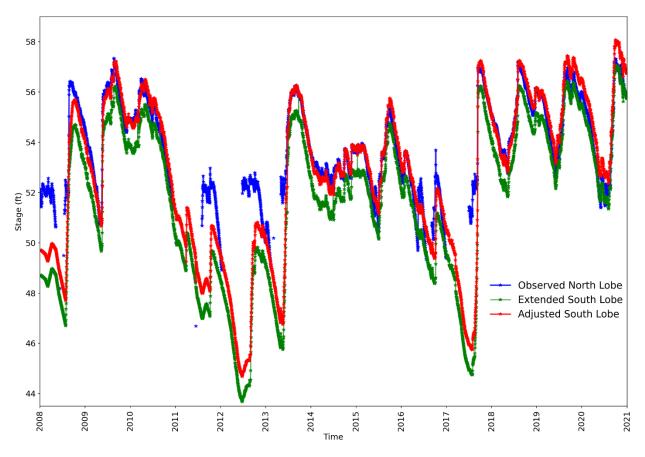


Figure 10. Comparison of North Lobe observed data and South Lobe extended data

### **Digital Elevation Model**

SJRWMD created a Digital Elevation Model (DEM) of the watershed. This process began with the 2018 USGS statewide Light Detection and Ranging (LiDAR)-based DEM collection. Adjustments were then made based on survey data to account for wetland vegetation, which can cause artificially high LiDAR values (Fox, 2023).

Available bathymetry data included acoustic doppler data from 2015 and manual surveys from 2016, 2021, and 2022. The lake edge was defined by a combination of these data and heads-up digitization of aerial photography taken in 1984 and 2014-2017. From these sources, a bathymetric DEM was created. This was then merged with the watershed DEM to generate the final topobathymetric data used for this study, shown in Figure 11. The boundary between the watershed DEM and the bathymetry DEM is also shown.

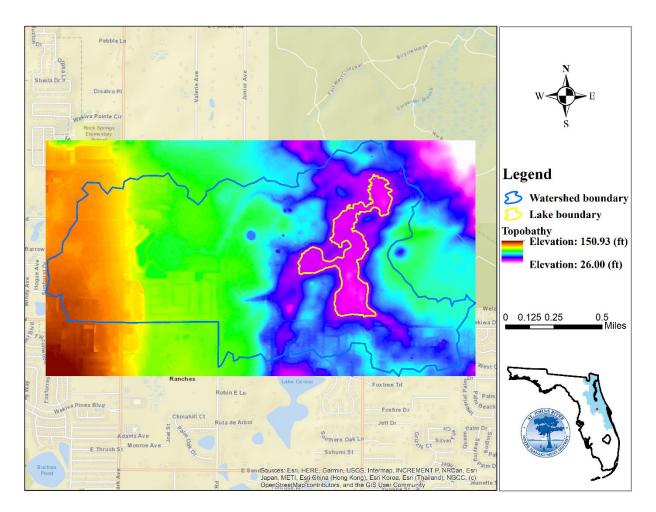


Figure 11. Topobathy DEM for Prevatt Lake watershed

### Watershed Delineation

The Prevatt watershed was divided into two distinct subwatersheds to provide separate runoff volumes to the North and South Lobes of the lake, shown in Figure 12. The delineation of Lake Prevatt's subwatersheds was done based on the topobathy data using standard ArcGIS Spatial Analyst hydrology tools. The site visits were done to verify the watershed boundary as well as the structure's location and the lake's discharge point. The lake connectivity of the two lobes at high stage (above 51 ft) was confirmed with the new bathymetry data as well.

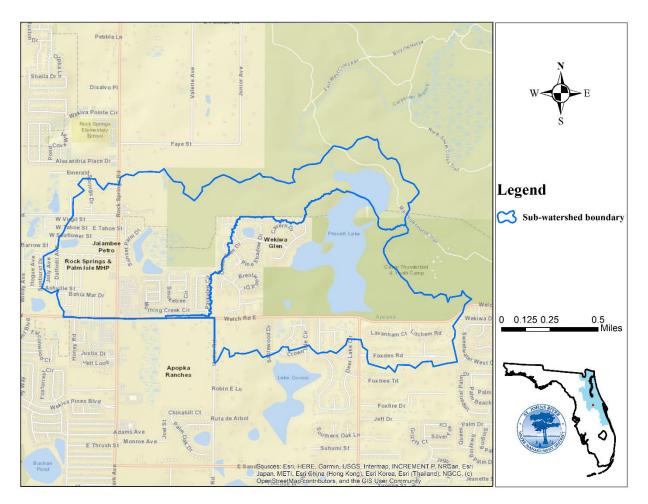


Figure 12. Subwatershed delineation for North and South Lobes

# **Other Geospatial Data**

The 2014 SJRWMD land use and land cover data set was used in this study. The original Florida Land Use Classification Code System (FLUCCS) land cover classes were regrouped into 13 classes following the HSPF land cover grouping method developed for the St Johns River Water Supply Impact Study (Cera et. al., 2012), based mainly on similarities of their hydrologic properties. Figure 13 is a map of the aggregated model land cover categories. The abbreviations for these categories used in this report are: LDR = low density residential; MDR = medium density residential; HDR = high density residential; CI = commercial-industrial; OPN = open land; AGR = agriculture; RNG = rangeland; FRS = forest; WAT=Water; WTL = wetland.

The soil maps were obtained from the Natural Resources Conservation Service (NRCS) Soil Survey Geographic (SSURGO) database. SSURGO classifies soils according to hydrologic groups, shown in Figure 14. The soils in the study area are predominantly type A (66%), which generally consists of well-drained sandy soils. The next most common soil type is A/D (27%), which is well drained when dry but poorly drained when the water table is near the surface.

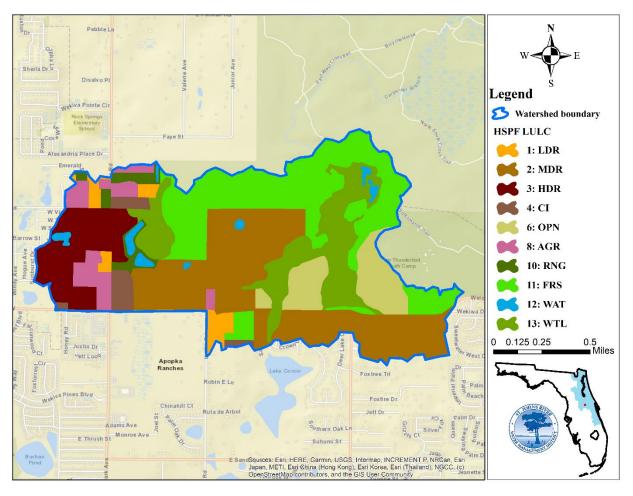


Figure 13. Model land cover categories

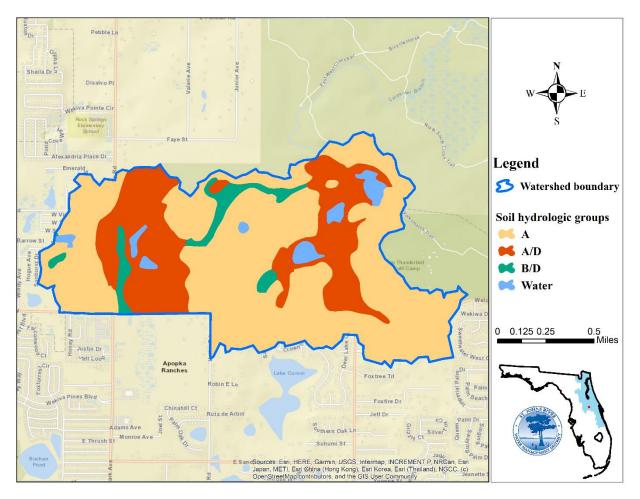


Figure 14. Soil hydrologic groups of the study area

# **MODEL DEVELOPMENT**

The HSPF model was constructed using the hydro-meteorological and geospatial data discussed above for the period 1995 to 2020. Acreages for model land cover and hydrologic soil groups for each subwatershed were computed. Stage/area and stage/volume relationships were developed for the North Lobe and South Lobe based on the topobathy DEM. A threshold stage level of 51 ft NAVD was set for the division between the two lobes and the model reaches were set up in such a way that the two lobes effectively become one lake at stages above that level. Also, seepage loss from the lake to the UFA was implemented in the model.

# Land Cover and Soils

The land cover data was computed for each subwatershed, summarized in Table 2. Typical impervious fractions of each model land cover category for SJRWMD HSPF models were used. We also divided our soil map. The new soil distribution in acreage per subwatershed is summarized in Table 3.

Land cover	Pervious Area (ac) within North Lobe	Pervious Area (ac) within South Lobe	Impervious Area (ac) within North Lobe	Impervious Area (ac) within South Lobe	Impervious Percentage
1: Low density residential	15.0	14.5	0.8	0.8	5%
2: Medium density residential	62.5	191.6	11.1	33.9	15%
3: High density residential	62.2	0.0	33.5	0.0	35%
4: Commercial/Industrial	12.7	1.5	12.7	1.5	50%
6: Open	0.0	81.7	0.0	0.0	-
8: General agriculture	45.8	3.3	0.0	0.0	-
10: Range	23.3	0.0	0.0	0.0	-
11: Forest	187.5	75.9	0.0	0.0	-
12: Water	15.7	1.5	0.0	0.0	-
13: Wetland	48.3	101.3	0.0	0.0	-

Table 2. Land cover areas within the Prevatt Lake watershed

Table 3. Hydrologic soil group areas within the Prevatt Lake watershed

Soil Group	Area (ac) within North Lobe	Area (ac) within South Lobe	Description
А	288.59	395.62	High infiltration rate
A/D	182.61	92.99	High or very low infiltration rate
B/D	40.57	5.12	Moderate or very low infiltration rate
Water	19.14	14.09	Water

# Water Body Characteristics

In HSPF the streams and lakes within a subwatershed are represented as a river reach or reservoir segment called RCHRES. The relationships between stage, surface area, volume, and discharge for a RCHRES are represented by a hydraulic function table called an FTABLE, a piecewise-linear function table. From the lake bathymetry data, a detailed stage-area-volume table (see Attachment) was

generated for each lobe of the lake using ArcGIS tools. The resulting stage-area and stage-volume curves for the North and South Lobe are shown respectively in Figure 15 and Figure 16. The stage-flow relationships for each lobe were derived from an Interconnected Channel and Pond Routing (ICPR v4) model.

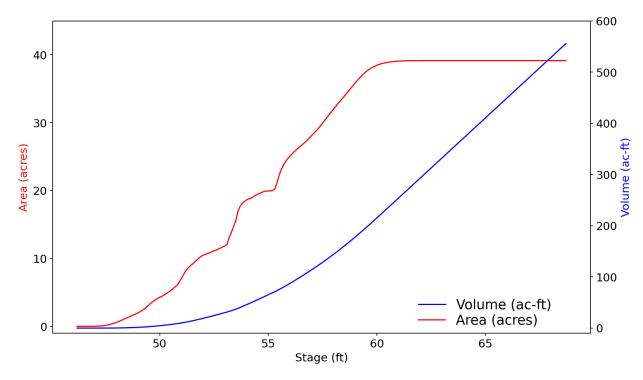


Figure 15. Stage-Area and Stage-Volume relationship for the North Lobe

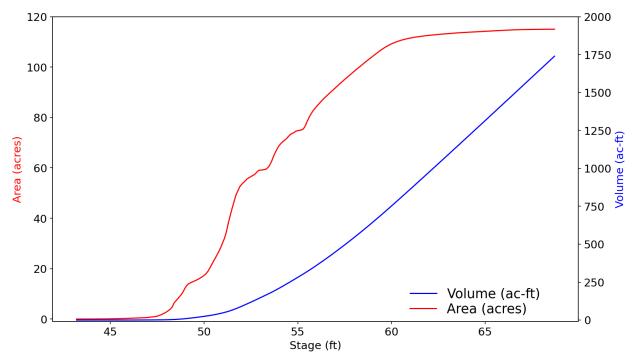


Figure 16. Stage-Area and Stage-Volume relationship for the South Lobe

#### Groundwater Losses from Lake to UFA

Prevatt Lake can lose water to the UFA, with the flux dependent on the gradient between the lake's water level and the pressure head in the UFA. The model simulated this loss using Darcy's Law:

$$Q = K \frac{\Delta H}{D} A$$

where:

Q[cfs] is the groundwater loss flux,  $K\left[\frac{ft}{s}\right]$  is the conductivity of the bed,  $\Delta H[ft]$  is head difference in elevation between the lake water level and the aquifer potentiometric surface, D[ft] is the depth of the bed material through which leakage occurs [ft], and  $A[ft^2]$  is the area of the lake bottom, considered here to be represented. The term K/D is called leakance (L) and considered in the model as a calibration parameter. The Special Actions module of HSPF was used to implement this equation.

### Variable Lake Surface Area

With the rise and fall of the lake stages due to seasonal weather changes, the area of the surrounding wetland is expected to fluctuate. This variation in areal coverage of the wetlands was simulated in the model through HSPF's Special Actions as well. This method is described in Jobes, 2022.

# **MODEL CALIBRATION AND VALIDATION**

The model was calibrated for the period from 2008 to 2020 and validated for the period from 1995 to 2007. The calibrated parameter values from the Middle St. Johns River Basin (MSJRB) HSPF model were used as a starting point for our calibration of the Prevatt model, which was carried out for both the North and South Lobes of Prevatt Lake. The validation process was carried out for the North Lobe only, since the record for the South Lobe was so short. The principal focus was on matching the simulated and observed stages, and on producing a reasonable simulated water balance.

The model calibration process focused on optimizing the model parameters including LZSN, INFILT, DEEPFR, AGWETP, UZSN, LZETP, and leakance (L) value. The final calibrated values for these parameters are shown in Table 4.

Parameter	Description	Units	Calibrated Value
LZSN	Lower zone nominal soil moisture storage	inches	2.0 to 6.0 for uplands, 0.50 for wetlands.
INFILT	Index to infiltration capacity	in/hr	0.21 to 0.44 for uplands, 0.001 for wetlands.
DEEPFR	Fraction of groundwater inflow to deep recharge	none	0.35
AGWETP	Fraction of remaining ET from active groundwater	none	0.0 for uplands, 0.9 for wetlands.
UZSN	Upper zone nominal soil moisture storage	inches	0.20 to 0.60 for uplands. 0.10 for wetlands.
LZETP	Lower zone ET parameter	none	0.33 to 0.89 for uplands, 0.90 for wetlands.
L	Leakance parameter	/day	0.0023 to 0.0032

Table 4. Calibrated values for principal hydrology parameters.

# Lake Stages

The North Lobe simulated stages generally matched the observed stages in terms of temporal variations during the calibration period, shown in Figure 17, along with the groundwater boundary condition. In general, the modeled stage closely followed the shape of the groundwater head timeseries. Performance metrics for the calibrated stages versus the observed stages are in Table 5. The model tended to overestimate the dry periods in 2011-2013 and 2016-2017 somewhat. A comparison of the duration curves in Figure 18 showed good agreement across most of the range, with a tendency to over-simulate slightly in the lowest 10%.

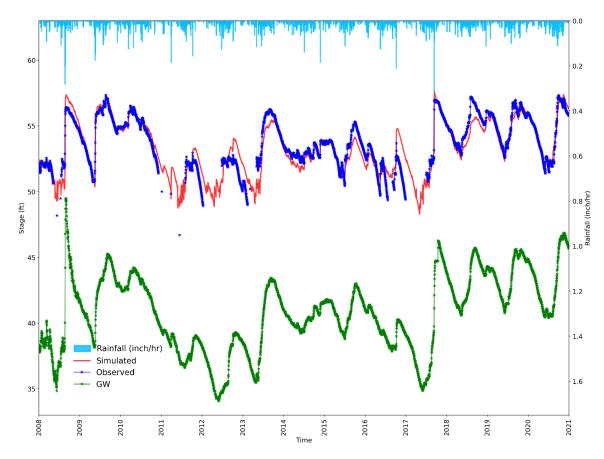


Figure 17. Observed and simulated daily stages for the North Lobe of Prevatt Lake for calibration period

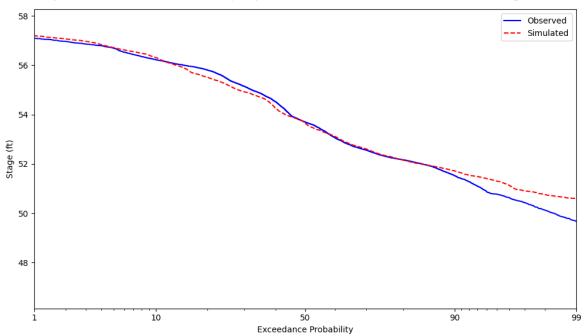


Figure 18. Observed and simulated daily stage duration curves for North Lobe for calibration period

Because the record of South Lobe observed daily stage is only available from 2022 to present, the extended and adjusted South Lobe data described above (Figure 10) was used for calibration. The simulated stages generally matched with the extended observed stage data for the calibration period, as seen in Figure 19. The adjusted data show significant drops in the periods 2011-2013 and 2016-2018 which is consistent with the groundwater level. The model overestimated the periods in early 2008, 2011-2013 and 2016-2017. The simulated and observed duration curves in Figure 20 showed a tendency to slightly under-simulate the high stages but clearly over-simulate the low stages. However, the uncertainty in the estimated "observed" record made it hard to justify using separate hydrology parameters for this lobe's subwatershed.

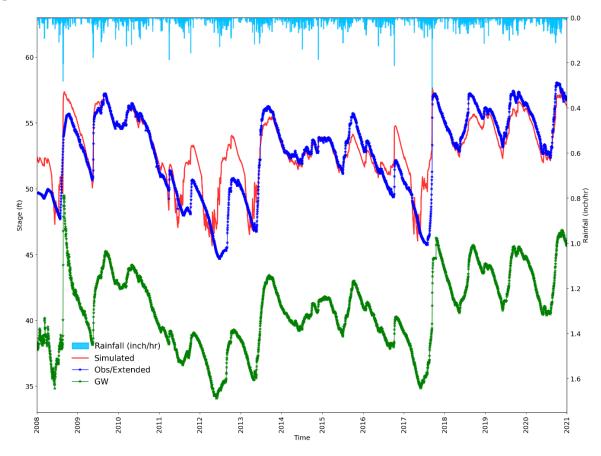


Figure 19. Observed/extended and simulated daily stages for the South Lobe of Prevatt Lake for calibration period

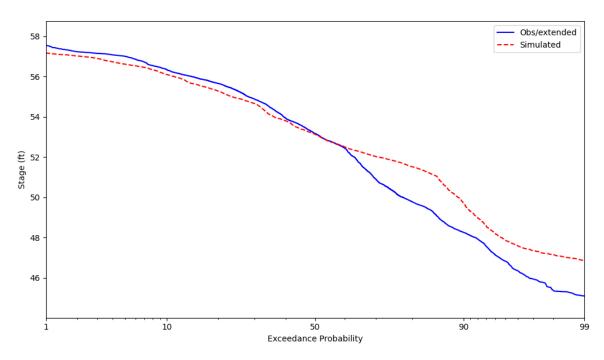


Figure 20. Observed and simulated daily stage duration curves for South Lobe for calibration period

The model was validated for a period from 1/4/1995 (the beginning of available NEXRAD rainfall data) to 12/31/2007. The model was validated only for the North Lobe due to the lack of observed stage data for the South Lobe during this time. In general, as seen in Figure 21, the simulated stages match well with the observed stages in terms of temporal variations during the latter part of the validation period where daily observations were available. In the earlier part of the period, when the observations are sparse, the model did not reproduce the lower stages well. The duration curve comparison in Figure 22 show reasonably good agreement across the board, with only a slight over-simulation of low stages. Thus, even with these limitations, the model adequately simulated stage for the North Lobe during the validation period.

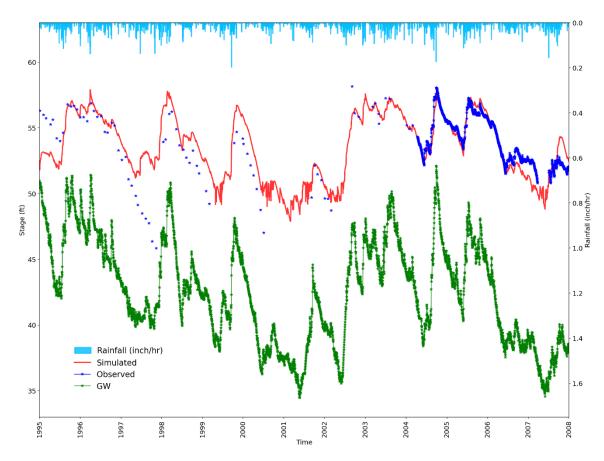


Figure 21. Observed and simulated daily stages for the North Lobe of Prevatt Lake for validation period

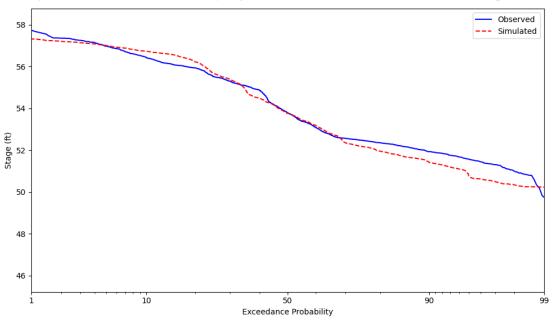


Figure 22. Observed and simulated daily stage duration curves for North Lobe for validation period

The detailed calibration and validation statistics for the North and South Lobes are shown in Table 5 and Table 6 respectively. For the North Lobe, most of the targeted values were achieved for both the calibration and validation periods, while for the South Lobe, where the extended "observations" are more uncertain, many of the targets were still met. Given this limitation in the data, the model performed reasonably well in matching the simulated stages to the available observations.

Statistics			Prevatt North Lobe Statistics		
Description	Symbol	Target value	Calibration	Validation	
Nash-Sutcliffe Efficiency	NSE	≥0.8 (cal) & 0.7 (val)	0.83	0.77	
Root Mean Squared Error	RMSE	$\leq \pm 1$ ft	0.77	0.90	
Mean Error	ME	$\leq \pm 1$ ft	-0.01	-0.07	
Percent Bias	PBIAS	$\leq \pm 10\%$ (cal) & $\pm 15\%$ (val)	-0.01	-0.14	
Pearson Correlation Coefficient	R	≥0.8 (cal) & 0.7 (val)	0.91	0.89	
Percent of observations bracketed within ± 1ft	±1ft (%)	≥0.85 (cal) & 0.7 (val)	82.72	78.25	

Table 5. Goodness-of-fit statistics for daily North Lobe stages simulation

Table 6. Goodness-of-fit statistics for daily South Lobe stages simulation

Statistics			<b>Prevatt South Lobe Statistics</b>		
Description Symbol		Target value	Calibration	Validation	
Nash-Sutcliffe Efficiency	NSE	≥0.8 (cal) & 0.7 (val)	0.73	27/1	
Root Mean Squared Error	RMSE	$\leq \pm 1$ ft	1.63	N/A	
Mean Error	ME	$\leq \pm 1$ ft	0.37	Due to lack	
Percent Bias	PBIAS	$\leq \pm 10\%$ (cal) & $\pm 15\%$ (val)	0.72	of	
Pearson Correlation Coefficient	R	≥0.8 (cal) & 0.7 (val)	0.86	observed	
Percent of observations bracketed within ± 1ft	±1ft (%)	≥0.85 (cal) & 0.7 (val)	65.30	data	

# Water Balance

Annual averages of the simulated water balance components, such as actual evapotranspiration (ET), surface runoff, baseflow, and recharge to UFA were assessed for both the calibration and validation periods. The values are reported for these two periods respectively in Table 7 and

Table 8 for each model land cover category. Simulated evapotranspiration accounted for more than 50% of the annual water balance, and the values for each category were close to target values developed by SJRWMD (Jobes, T., 2022). The recharge to the UFA was within the bounds of SJRWMD estimates of long-term average values (Boniol and Mouyard, 2016). Overall, the simulated water balance components were reasonable.

Table 7. Annual average water budget for the calibration period per land-use in inches per year

Description	LDR	MDR	HDR	CI	OPN	AGR	RNG	FRS	WTL	Watershed
Rainfall	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1	51.1
Evapotranspiration	35.4	33.1	28.3	24.7	27.8	39.8	38.3	42.3	48.3	37.1
Total runoff	11.5	14.3	20	24.2	16.1	7.5	8.7	5.7	0.7	10.5
Baseflow	7.9	7.9	7.9	7.9	13.4	6.7	7.5	5.3	0.6	5.8
Recharge to UFA	4.3	4.3	4.3	4.3	7.2	3.6	4.0	2.9	1.1	3.2

Description	LDR	MDR	HDR	CI	OPN	AGR	RNG	FRS	WTL	Watershed
Rainfall	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7	47.7
Evapotranspiration	33.4	31.2	26.7	23.3	26.5	37.5	36.1	39.6	46.0	35.0
Total runoff	10.6	13.2	18.5	22.5	14.8	6.9	7.9	5.4	0.9	9.8
Baseflow	7.8	7.8	7.8	7.8	12.7	6.7	7.4	5.4	0.6	5.7
Recharge to UFA	4.2	4.2	4.2	4.2	6.8	3.6	4.0	2.9	1.0	3.2

Table 8. Annual average water budget for the validation period per land-use in inches per year

#### Table 9 and

Table 10 summarize the annual average water budgets for the North and South Lobes of Prevatt Lake for both the calibration and validation periods. The tables indicate that seepage to groundwater dominate the outflow components of the lake. Higher surface outflows from the North Lobe are simulated during the validation period, due to the higher average direct rainfall compared to the calibration period.

Period	Direct Rain	Water- shed Inflow	Flow from South	Total Inflow	ET	GW Loss	Outfall	Flow to South	Total Outflow
Calibration	61.1	451.7	44.4	557.3	59.4	155.0	57.3	280.1	551.8
Percent	11.0	81.1	8.0	-	10.8	28.1	10.4	50.8	-
Validation	65.7	420.9	76.6	563.2	63.1	144.1	125.3	235.8	568.2
Percent	11.7	74.7	13.6	-	11.1	25.4	22.0	41.5	-

Table 9. Annual average water budget for North Lobe in acre-feet

Table 10. Annual average water budget for South Lobe in acre-feet

Period	Direct Rain	Water- shed Inflow	Flow from North	Total Inflow	ET	GW Loss	Flow to North	Total Outflow
Calibration	236.5	440.2	280.1	956.8	231.3	660.4	44.4	936.1
Percent	24.7	46.0	29.3	-	24.7	70.5	4.7	-
Validation	239.3	408.0	235.8	883.1	231.7	566.7	76.6	875.1
Percent	27.1	46.2	26.7	-	26.5	64.8	8.8	-

# LONG-TERM SIMULATION

Using the extended rainfall, PET, and UFA stages, we extended the calibrated and validated HSPF model to the period from 1/1/1953 to 12/31/2020. The daily simulated stages adequately represented the temporal evolutions and variations of the long-term observed stage of Prevatt Lake for the North Lobe (Figure 23) and South Lobe (Figure 24).

Statistics	Symbol	North Lobe
Nash-Sutcliffe Efficiency	NSE	0.78
Root Mean Squared Error	RMSE	0.89
Mean Error	ME	0.03
Percent Bias	PBIAS	0.05
Pearson Correlation Coefficient	R	0.87

Table 11. Goodness-of-fit statistics for daily North Lobe Prevatt Lake long-term stages simulation

The performance metrics for the long-term simulations (Table 11) for the North Lobe were lower in comparison to the calibration statistics, while since the South Lobe "observed" is only estimated, the performance metrics were not compared. Factors that may contribute to this include the additional uncertainty due to using estimated extensions of the groundwater boundary and South Lobe observed stages, the switch from NEXRAD rainfall used in calibration to a point station some distance from the watershed, and changing conditions on the watershed itself, such as land cover changes due to development. The fact that the metrics are still acceptable is evidence that the model is sufficient for predicting long-term behavior of the system outside of the calibration and validation periods.

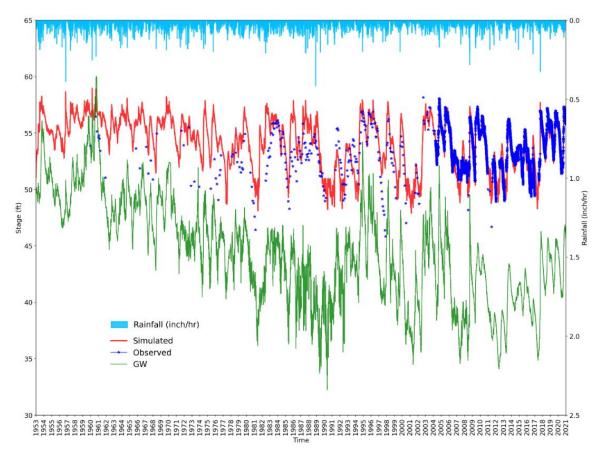


Figure 23. Daily long-term observed and simulated stages of the North Lobe of Prevatt Lake

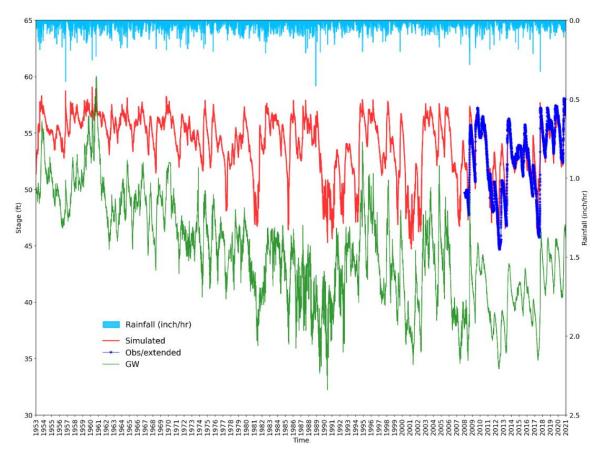


Figure 24. Daily long-term observed and simulated stages of the South Lobe of Prevatt Lake

# SENSITIVITY ANALYSIS

We performed model sensitivity analysis using a one-factor-at-a-time method, which is commonly called the "local" method (Saltelli et al., 2004; Campolongo et al., 2010). This method varies one model input parameter value at a time while other model input parameter values are kept constant. Using this method, we evaluated the importance of certain HSPF parameters on the simulated stages of Prevatt Lake.

We compared and investigated the sensitivity of five selected parameters: leakance (L), lower zone nominal storage (LZSN), the fraction of recharge that becomes inactive groundwater inflow (DEEPFR), lower zone ET parameter (LZETP), and infiltration index (INFILT). The leakance was varied by factors of 2 and 3, while the rest of parameters were varied by increasing and decreasing by 10% and 20%. The timeseries and performance metrics from these runs were compared to the original model results for the calibration period. The resulting goodness-of-fit statistics are summarized in Table 12 and Table 13 for North Lobe and South Lobe, respectively. Figure 25 through Figure 34 show time series plots and comparison plots of stage duration curves for each parameter for each lobe.

We found that the leakance, which controls the UFA flux to or from the lake, was the most sensitive/important parameter for Prevatt Lake. In contrast, increasing or decreasing the LZSN, DEEPFR and INFILT values by 10 or 20% made only relatively small changes to the simulated stages. LZETP showed some impact on simulated stages, but not as strongly as the leakance.

Finally, it is expected that increasing the leakance can move the simulated stage hydrographs downward and vice versa. Overall, leakance and LZETP are identified as the parameters to which the model output is most sensitive.

Demonster	Calibrated relate	Cali	bration st	atistics	Sei	nsitivity st	atistics	Ab	solute cha	inge
Parameter	Calibrated value	NSE	RMSE	PBIAS	NSE	RMSE	PBIAS	NSE	RMSE	PBIAS
	Divided by 2				-0.50	2.27	3.63	-1.33	1.5	3.64
Leakance	Divided by 3	0.92	0.77	-0.01	-1.49	2.93	4.70	-2.32	2.16	4.71
Leakance	Multiplied by 2	0.83	0.77	-0.01	-0.93	2.58	-4.31	-1.76	1.81	-4.3
	Multiplied by 3				-2.33	3.39	-5.72	-3.16	2.62	-5.71
	Decreased by 20%				0.81	0.79	0.18	-0.02	0.02	0.19
LZSN	Decreased by 10%	0.83	0.77	-0.01	0.82	0.78	0.11	-0.01	0.01	0.12
LZSIN	Increased by 10%	0.05	0.77		0.83	0.78	-0.07	0.00	0.01	-0.06
	Increased by 20%				0.82	0.77	-0.12	-0.01	0.00	-0.11
	Decreased by 20%	0.83	0.77	-0.01	0.81	0.79	0.39	-0.02	0.02	0.4
DEEPFR	Decreased by 10%				0.82	0.77	0.15	-0.01	0.00	0.16
DEEFFK	Increased by 10%				0.83	0.74	-0.28	0.00	-0.03	-0.27
	Increased by 20%				0.82	0.78	-0.47	-0.01	0.01	-0.46
	Decreased by 20%				0.76	0.89	0.72	-0.07	0.12	0.73
LZETP	Decreased by 10%	0.83	0.77	0.01	0.81	0.79	0.31	-0.02	0.02	0.32
LZEIP	Increased by 10%	0.85	0.77	-0.01	0.82	0.77	-0.43	-0.01	0.00	-0.42
	Increased by 20%				0.67	1.05	-0.91	-0.16	0.28	-0.9
	Decreased by 20%				0.83	0.77	-0.02	0.00	0.00	-0.01
INCH T	Decreased by 10%	0.92	0.77	0.01	0.83	0.77	-0.03	0.00	0.00	-0.02
INFILT	Increased by 10%	0.83	0.77	-0.01	0.83	0.77	0.02	0.00	0.00	0.03
	Increased by 20%				0.83	0.76	0.04	0.00	-0.01	0.05

Table 12. Impact on model goodness-of-fit statistics compared to calibrated values for North Lobe

Table 13. Impact on model goodness-of-fit statistics compared to calibrated values for South Lobe

Parameter	Calibrated value	Calibration statistics			Sensitivity statistics			Absolute change		
		NSE	RMSE	PBIAS	NSE	RMSE	PBIAS	NSE	RMSE	PBIAS
Leakance	Divided by 2	0.73	1.63	0.72	-0.23	3.47	5.18	-0.96	1.84	4.46
	Divided by 3				-0.87	4.27	6.50	-1.60	2.64	5.78
	Multiplied by 2				-0.26	3.51	-5.08	-0.99	1.88	-5.8
	Multiplied by 3				-1.15	4.58	-7.20	-1.88	2.95	-7.92
LZSN	Decreased by 20%	0.73	1.63	0.72	0.68	1.74	0.94	-0.05	0.11	0.22
	Decreased by 10%				0.69	1.72	0.84	-0.04	0.09	0.12
	Increased by 10%				0.72	1.60	0.64	-0.01	-0.03	-0.08
	Increased by 20%				0.73	1.59	0.57	0.00	-0.04	-0.15
DEEPFR	Decreased by 20%	0.73	1.63	0.72	0.68	1.75	1.14	-0.05	0.12	0.42
	Decreased by 10%				0.72	1.64	0.88	-0.01	0.01	0.16
	Increased by 10%				0.73	1.57	0.37	0.00	-0.06	-0.35
	Increased by 20%				0.73	1.56	0.16	0.00	-0.07	-0.56
LZETP	Decreased by 20%	0.73	1.63	0.72	0.63	1.87	1.56	-0.10	0.24	0.84
	Decreased by 10%				0.68	1.74	1.09	-0.05	0.11	0.37
	Increased by 10%				0.74	1.57	0.14	0.01	-0.06	-0.58
	Increased by 20%				0.66	1.81	-0.43	-0.07	0.18	-1.15
INFILT	Decreased by 20%	0.73	1.63	0.72	0.70	1.71	0.70	-0.03	0.08	-0.02
	Decreased by 10%				0.73	1.63	0.69	0.00	0.00	-0.03
	Increased by 10%				0.73	1.63	0.74	0.00	0.00	0.02
	Increased by 20%				0.73	1.63	0.77	0.00	0.00	0.05

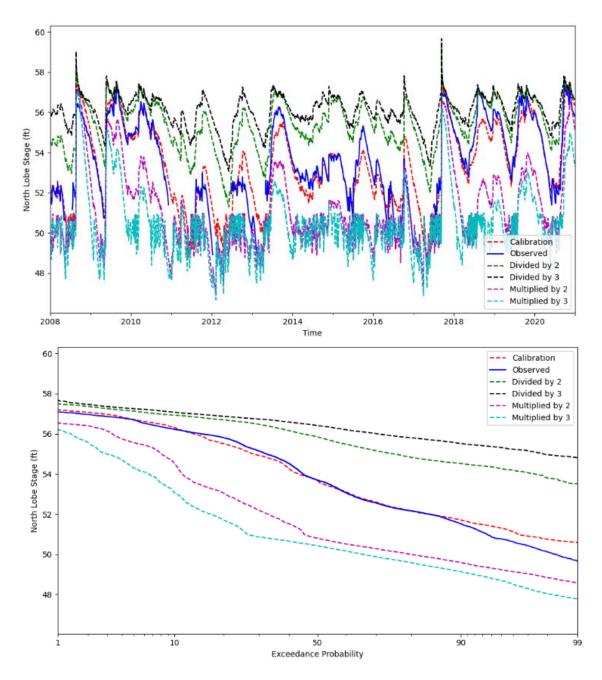


Figure 25. Impact of leakance value on simulated stages of the North Lobe of Prevatt Lake

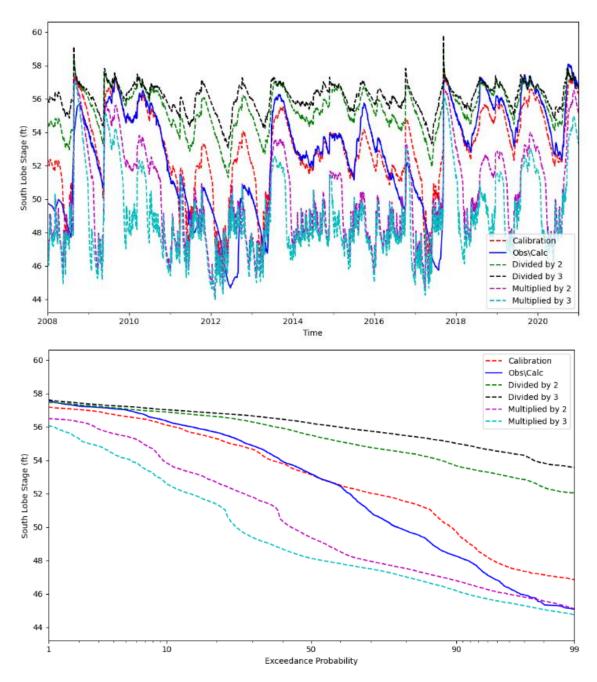


Figure 26. Impact of leakance value on simulated stages of the South Lobe of Prevatt Lake

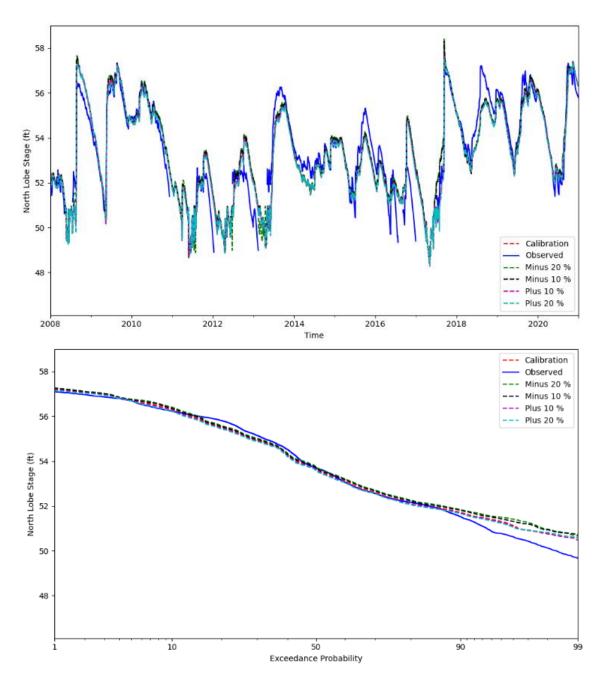


Figure 27. Impact of LZSN on simulated stages of the North Lobe of Prevatt Lake

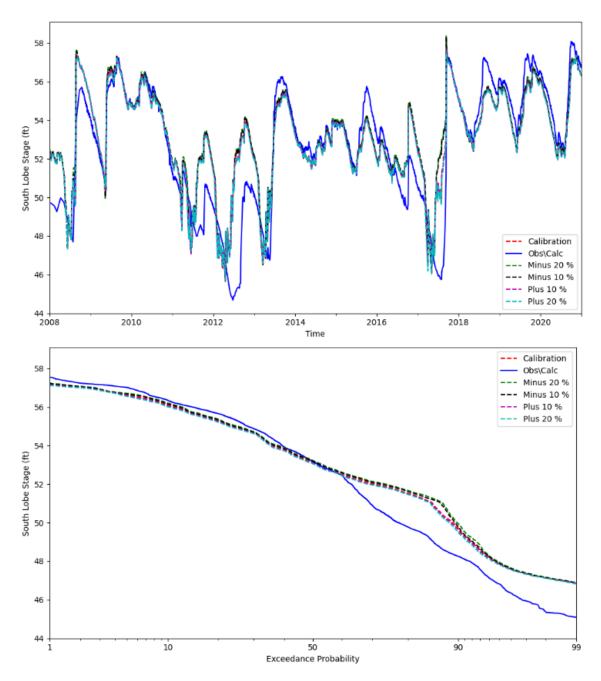


Figure 28. Impact of LZSN on simulated stages of the South Lobe of Prevatt Lake

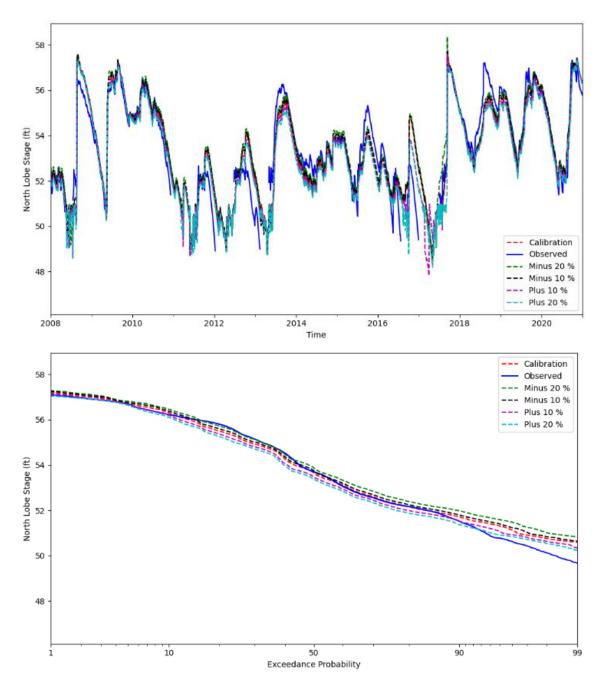


Figure 29. Impact of DEEPFR on simulated stages of the North Lobe of Prevatt Lake

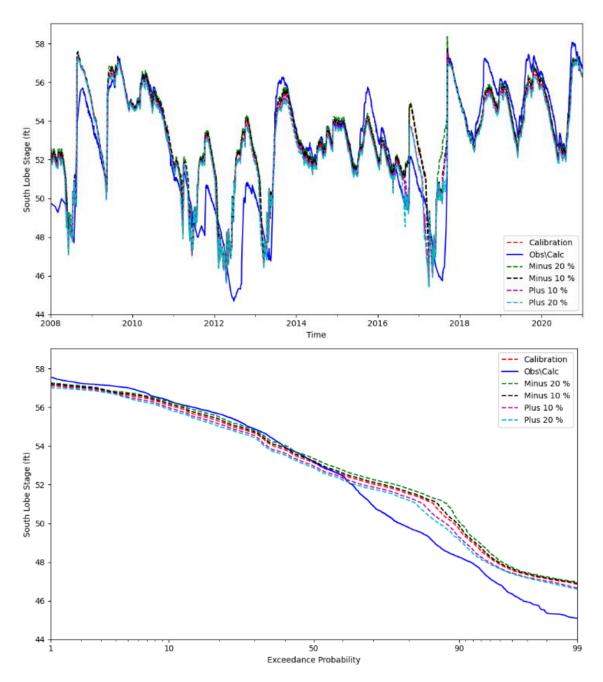


Figure 30. Impact of DEEPFR on simulated stages of the South Lobe of Prevatt Lake

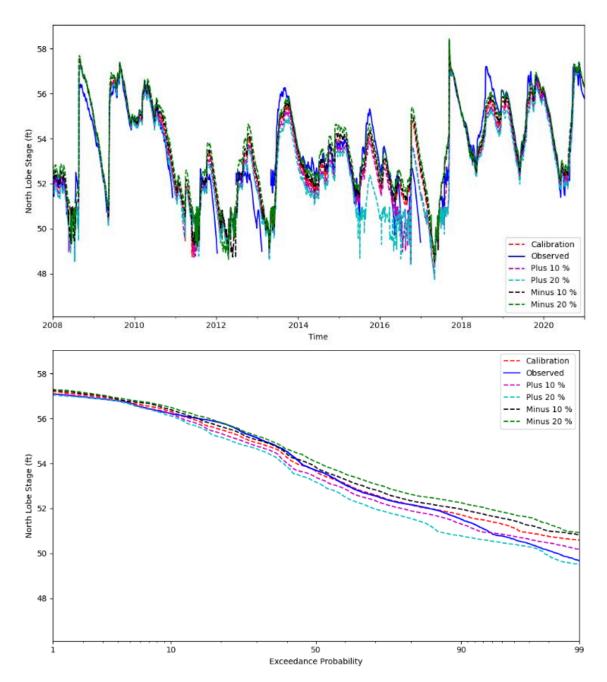


Figure 31. Impact of LZETP on simulated stages of the North Lobe of Prevatt Lake

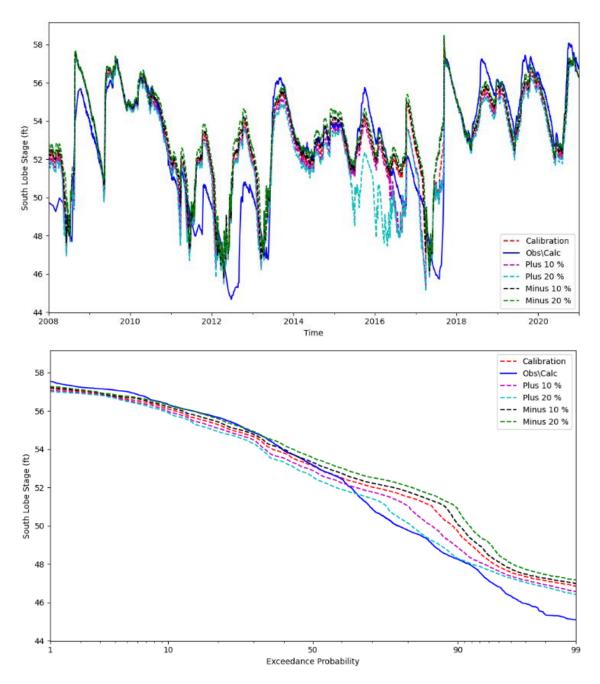


Figure 32. Impact of LZETP on simulated stages of the South Lobe of Prevatt Lake

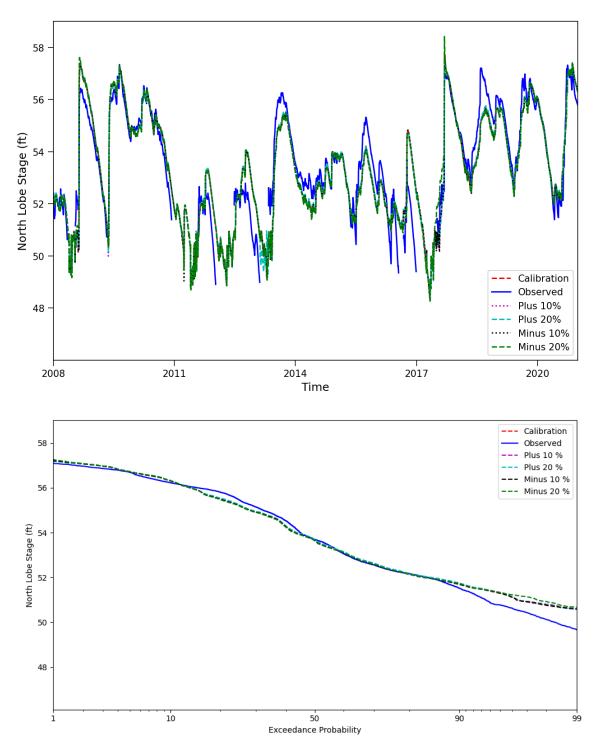


Figure 33. Impact of INFILT on simulated stages of the North Lobe of Prevatt Lake

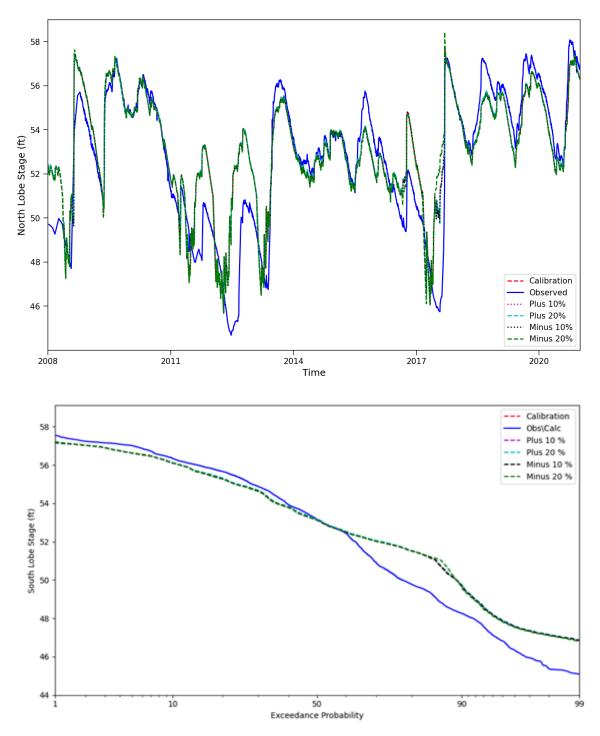


Figure 34. Impact of INFILT on simulated stages of the South Lobe of Prevatt Lake

## **SUMMARY AND CONCLUSIONS**

In support of hydrologic and MFL modeling of Prevatt Lake, we collected, reviewed, and analyzed available hydro-meteorological and geo-spatial data of the Prevatt watershed. Based on the available hydro-meteorological and GIS data, we set up the model for the period 1995 to 2020, calibrated the model for the period 2008 to 2020, and validated it for the period 1995 to 2007. We subsequently extended the calibrated and validated model to the period from 1953 to 2020 for long-term simulations. We also conducted a parameter sensitivity analysis for the calibration period of the extended model and determined the most sensitive parameters for the model.

The HSPF model reasonably reproduced the observed daily water stages for Prevatt Lake for both calibration and validation periods. Most of the daily statistical values met the targeted values, especially the percent of observations bracketed within  $\pm$  1ft and Nash-Sutcliffe Efficiency (NSE). The model adequately replicated the long-term daily observed stages of the lake, achieving acceptable statistical evaluation values and performance ratings. We also identified that the leakance and lower zone ET parameters are the most sensitive parameters for modeling the hydrologic processes of Prevatt Lake. Overall, the HSPF model showed reasonable simulations of surface water-groundwater interaction processes and the water budget of Prevatt Lake, indicating the model can be used for MFL modeling and analysis.

## REFERENCES

- Boniol D. and Mouyard K. (2016). Recharge to the Upper Floridan Aquifer in the St. Johns River Water Management District, Florida. Technical Fact Sheet SJ2016-FS1.
- Campolongo F., Saltelli A. and Cariboni J. (2010). From screening to quantitative sensitivity analysis. A unified approach. Computer Physics Communications 182(4): 978-988. https://doi:10.1016/j.cpc.2010.12.039.
- Cera, T., Smith, D.S., Cullum, M.G., Adkins, M., Amoah, J., Clapp, D., Freeman, R., Hafner, M., Huang, X., Jia, Y., Jobes, T., and Mao, M. 2012. St. Johns River water supply impact study, chapter 3: watershed hydrology. St. Johns River Water Management District, Palatka, FL.
- Fox, S. (2023). Construction of the Lake Prevatt FY23 topobathymetric digital elevation model for MFLs modeling DRAFT
- Helsel, D.R. and Hirsch, R.M. (2002). Statistical Methods in Water Resources (Chapter A3). Available at <u>http://pubs.er.usgs.gov/publication/twri04A3.</u>

Jobes, T. (2022). HSPF Common Logic for The St. Johns River Water Management District. Saltelli, A., Tarantola S., Campolongo. F., and Ratto M. (2004). Sensitivity Analysis in Practice: A

Guide to Assessing Scientific Models. John Wiley & Sons.

## ATTACHMENT

Stage (ft)	North Lobe Area (acres)	North Lobe Volume (ac-ft)
46.2	0.01	0
46.3	0.01	0
46.4	0.01	0
46.5	0.02	0
46.6	0.02	0.01
46.7	0.02	0.01
46.8	0.02	0.01
46.9	0.02	0.01
47	0.02	0.01
47.1	0.04	0.02
47.2	0.05	0.02
47.3	0.07	0.03
47.4	0.1	0.04
47.5	0.14	0.05
47.6	0.2	0.07
47.7	0.28	0.09
47.8	0.37	0.12
47.9	0.48	0.16
48	0.58	0.22
48.1	0.7	0.28
48.2	0.84	0.36
48.3	0.98	0.45
48.4	1.13	0.56
48.5	1.27	0.68
48.6	1.41	0.81
48.7	1.57	0.96
48.8	1.71	1.12
48.9	1.84	1.3
49	1.98	1.49
49.1	2.16	1.7
49.2	2.37	1.92
49.3	2.59	2.17
49.4	2.85	2.44
49.5	3.15	2.74
49.6	3.43	3.07
49.7	3.69	3.43

Attachment - 1. Stage-Area and Stage-Volume dataset for the North Lobe

49.8	3.93	3.81
49.9	4.11	4.21
50	4.27	4.63
50.1	4.44	5.07
50.2	4.62	5.52
50.3	4.82	5.99
50.4	5.03	6.48
50.5	5.25	7
50.6	5.51	7.54
50.7	5.79	8.1
50.8	6.05	8.69
50.9	6.54	9.32
51	7.06	10
51.1	7.62	10.73
51.2	8.18	11.52
51.3	8.57	12.36
51.4	8.89	13.24
51.5	9.16	14.14
51.6	9.43	15.07
51.7	9.74	16.03
51.8	10.05	17.02
51.9	10.31	18.03
52	10.47	19.07
52.1	10.61	20.13
52.2	10.74	21.19
52.3	10.86	22.27
52.4	11	23.37
52.5	11.12	24.47
52.6	11.25	25.59
52.7	11.38	26.72
52.8	11.54	27.87
52.9	11.71	29.03
53	11.84	30.21
53.1	12.06	31.4
53.2	13.1	32.66
53.3	13.84	34.01
53.4	14.68	35.43
53.5	15.49	36.94
53.6	16.94	38.56
53.7	17.67	40.3

53.8	18.09	42.09
53.9	18.41	43.91
54	18.63	45.76
54.1	18.09	47.64
54.2	18.79	49.52
54.3	19.06	51.42
54.4	19.29	53.33
54.5	19.44	55.27
54.6	19.6	57.22
54.7	19.74	59.19
54.8	19.88	61.17
54.9	19.93	63.16
55	19.96	65.16
55.1	19.98	67.16
55.2	20.01	69.15
55.3	20.23	71.16
55.4	21.12	73.23
55.5	22.24	75.39
55.6	23.11	77.66
55.7	23.79	80.01
55.8	24.3	82.42
55.9	24.73	84.87
56	25.09	87.36
56.1	25.42	89.89
56.2	25.74	92.44
56.3	26.04	95.03
56.4	26.33	97.65
56.5	26.6	100.3
56.6	26.88	102.97
56.7	27.15	105.67
56.8	27.46	108.4
56.9	27.79	111.17
57	28.12	113.96
57.1	28.45	116.79
57.2	28.8	119.65
57.3	29.14	122.55
57.4	29.54	125.48
57.5	29.95	128.46
57.6	30.34	131.47
57.7	30.77	134.53

<b>57</b> 0	01.15	107.50
57.8	31.17	137.63
57.9	31.59	140.76
58	31.99	143.94
58.1	32.4	147.16
58.2	32.79	150.42
58.3	33.16	153.72
58.4	33.53	157.05
58.5	33.91	160.43
58.6	34.3	163.84
58.7	34.69	167.29
58.8	35.08	170.78
58.9	35.47	174.3
59	35.87	177.87
59.1	36.24	181.48
59.2	36.59	185.12
59.3	36.93	188.79
59.4	37.24	192.5
59.5	37.52	196.24
59.6	37.76	200
59.7	37.98	203.79
59.8	38.17	207.6
59.9	38.33	211.43
60	38.47	215.27
60.1	38.59	219.12
60.2	38.69	222.98
60.3	38.77	226.86
60.4	38.84	230.74
60.5	38.9	234.62
60.6	38.95	238.52
60.7	38.98	242.41
60.8	39.02	246.31
60.9	39.05	250.22
61	39.07	254.12
61.1	39.09	258.03
61.2	39.11	261.94
61.3	39.12	265.85
61.4	39.13	269.76
61.5	39.13	273.68
61.6	39.14	277.59
61.7	39.14	281.5

61.8	39.14	285.42
61.9		
	39.14	289.33
62	39.15	293.25
62.1	39.15	297.16
62.2	39.15	301.08
62.3	39.15	304.99
62.4	39.15	308.91
62.5	39.15	312.82
62.6	39.15	316.74
62.7	39.15	320.65
62.8	39.15	324.57
62.9	39.15	328.48
63	39.15	332.4
63.1	39.15	336.31
63.2	39.15	340.23
63.3	39.15	344.14
63.4	39.15	348.06
63.5	39.15	351.97
63.6	39.15	355.89
63.7	39.15	359.8
63.8	39.15	363.72
63.9	39.15	367.64
64	39.15	371.55
64.1	39.15	375.47
64.2	39.15	379.38
64.3	39.15	383.3
64.4	39.15	387.21
64.5	39.15	391.13
64.6	39.15	395.04
64.7	39.15	398.96
64.8	39.15	402.87
64.9	39.15	406.79
65	39.15	410.71
65.1	39.15	414.62
65.2	39.15	418.54
65.3	39.15	422.45
65.4	39.15	426.37
65.5	39.15	430.28
65.6	39.15	434.2
65.7	39.15	438.11

65.8	39.15	442.03
65.9	39.15	445.94
66	39.15	449.86
66.1	39.15	453.78
66.2	39.15	457.69
66.3	39.15	461.61
66.4	39.15	465.52
66.5	39.15	469.44
66.6	39.15	473.35
66.7	39.15	477.27
66.8	39.15	481.18
66.9	39.15	485.1
67	39.15	489.01
67.1	39.15	492.93
67.2	39.15	496.85
67.3	39.15	500.76
67.4	39.15	504.68
67.5	39.15	508.59
67.6	39.15	512.51
67.7	39.15	516.42
67.8	39.15	520.34
67.9	39.15	524.25
68	39.15	528.17
68.1	39.15	532.08
68.2	39.15	536
68.3	39.15	539.91
68.4	39.15	543.83
68.5	39.15	547.75
68.6	39.15	551.66
68.7	39.15	555.58
L		

Attachment - 2. Stage-Area and Stage-Volume dataset for the South Lobe

Stage (ft)	South Lobe Area (acres)	South Lobe Volume (ac-ft)
43.2	0	0
43.3	0	0
43.4	0	0
43.5	0	0
43.6	0	0
43.7	0	0
43.8	0	0

43.9	0	0
43.9	0.01	0
44.1		
	0.01	0
44.2	0.02	0
44.3	0.02	0.01
44.4	0.03	0.01
44.5	0.04	0.01
44.6	0.05	0.02
44.7	0.06	0.02
44.8	0.06	0.03
44.9	0.08	0.03
45	0.09	0.04
45.1	0.1	0.05
45.2	0.11	0.06
45.3	0.13	0.07
45.4	0.15	0.09
45.5	0.17	0.1
45.6	0.19	0.12
45.7	0.21	0.14
45.8	0.23	0.16
45.9	0.26	0.19
46	0.29	0.22
46.1	0.33	0.25
46.2	0.36	0.28
46.3	0.39	0.32
46.4	0.42	0.36
46.5	0.45	0.4
46.6	0.48	0.45
46.7	0.5	0.5
46.8	0.54	0.55
46.9	0.57	0.61
47	0.62	0.67
47.1	0.74	0.73
47.2	0.81	0.81
47.3	0.89	0.9
47.4	0.98	0.99
47.5	1.13	1.09
47.6	1.42	1.22
47.7	1.69	1.37
47.8	2.03	1.56
	-	

47.9	2.39	1.78
48	2.85	2.04
48.1	3.37	2.35
48.2	3.95	2.72
48.3	4.81	3.15
48.4	6.38	3.71
48.5	7.24	4.4
48.6	8.09	5.16
48.7	8.97	6.01
48.8	9.87	6.96
48.9	11.08	8
49	12.51	9.19
49.1	13.52	10.49
49.2	14.12	11.88
49.3	14.48	13.31
49.4	14.81	14.77
49.5	15.14	16.27
49.6	15.48	17.8
49.7	15.87	19.37
49.8	16.29	20.97
49.9	16.76	22.63
50	17.32	24.33
50.1	17.92	26.09
50.2	18.89	27.93
50.2	20.17	29.88
50.5	21.52	31.96
50.4	22.89	34.19
50.6	24.23	36.54
50.0	25.58	39.03
50.8	26.98	41.66
50.9	28.59	44.43
51	30.41	47.39
51.1	32.27	50.52
51.2	34.87	53.87
51.3	38.32	57.52
51.4	41.23	61.5
51.5	41.25	65.77
51.6	46.62	70.31
51.7	40.02	75.11
51.8	50.84	80.11

52.46	85.27
53.42	90.56
54.17	95.94
54.86	101.39
55.63	106.93
56.1	112.51
56.54	118.15
56.97	123.82
57.38	129.54
58.18	135.33
58.94	141.17
59.12	147.08
59.14	152.99
59.3	158.91
59.46	164.85
	170.82
61.08	176.87
62.55	183.05
	189.4
	195.93
	202.62
	209.44
	216.36
	223.37
	230.43
71.61	237.56
	244.76
	252.05
	259.39
	266.78
	274.2
	281.67
	289.15
	296.65
	304.17
	311.76
	319.52
	327.44
	335.51
82.49	343.7
	53.42   54.17   54.86   55.63   56.1   56.54   56.97   57.38   58.18   58.94   59.12   59.14   59.3   59.46   60.05   61.08   62.55   64.48   66.12   67.56   68.76   69.68   70.39   70.39   70.39   70.39   73.19   73.66   74.02   74.56   74.74   74.91   75.04   75.46   76.65   78.4   80   81.32

55.9	83.46	352
56	84.33	360.39
56.1	85.16	368.86
56.2	86	377.42
56.3	86.81	386.06
56.4	87.56	394.78
56.5	88.27	403.57
56.6	88.97	412.43
56.7	89.66	421.36
56.8	90.35	430.36
56.9	91.01	439.43
57	91.7	448.57
57.1	92.39	457.77
57.2	93.07	467.05
57.3	93.74	476.39
57.4	94.41	485.79
57.5	95.07	495.27
57.6	95.7	504.81
57.7	96.34	514.41
57.8	96.97	524.07
57.9	97.62	533.8
58	98.25	543.6
58.1	98.88	553.45
58.2	99.48	563.37
58.3	100.1	573.35
58.4	100.71	583.39
58.5	101.32	593.49
58.6	101.94	603.65
58.7	102.54	613.88
58.8	103.12	624.16
58.9	103.71	634.5
59	104.28	644.9
59.1	104.87	655.36
59.2	105.43	665.88
59.3	105.99	676.45
59.4	106.54	687.07
59.5	107.06	697.75
59.6	107.55	708.48
59.7	108.01	719.26
59.8	108.43	730.08

59.9	108.84	740.95
60	109.21	751.85
60.1	109.53	762.79
60.2	109.82	773.76
60.3	110.11	784.75
60.4	110.36	795.78
60.5	110.6	806.82
60.6	110.81	817.9
60.7	111	828.99
60.8	111.18	840.1
60.9	111.35	851.22
61	111.5	862.36
61.1	111.65	873.52
61.2	111.78	884.69
61.3	111.9	895.88
61.4	112.01	907.07
61.5	112.01	918.28
61.6	112.21	929.5
61.7	112.21	929.5
61.8	112.31	940.72
61.9	112.41	963.2
61.9	112.49	905.2
62	112.65	985.72
62.1		
	112.73	996.99
62.3 62.4	112.8	1008.26
	112.87	1019.55
62.5	112.94	1030.84
62.6	113	1042.13
62.7	113.07	1053.44
62.8	113.13	1064.75
62.9	113.19	1076.06
63	113.26	1087.39
63.1	113.32	1098.72
63.2	113.38	1110.05
63.3	113.44	1121.39
63.4	113.5	1132.74
63.5	113.55	1144.09
63.6	113.6	1155.45
63.7	113.65	1166.81
63.8	113.69	1178.18

63.9	113.73	1189.55
		1200.93
64	113.77	
64.1	113.81	1212.31
64.2	113.85	1223.69
64.3	113.89	1235.07
64.4	113.93	1246.47
64.5	113.97	1257.86
64.6	114.01	1269.26
64.7	114.05	1280.66
64.8	114.09	1292.07
64.9	114.14	1303.48
65	114.18	1314.9
65.1	114.22	1326.32
65.2	114.26	1337.74
65.3	114.3	1349.17
65.4	114.34	1360.6
65.5	114.38	1372.04
65.6	114.43	1383.48
65.7	114.47	1394.93
65.8	114.51	1406.37
65.9	114.54	1417.83
66	114.58	1429.28
66.1	114.61	1440.74
66.2	114.64	1452.2
66.3	114.68	1463.67
66.4	114.72	1475.14
66.5	114.76	1486.61
66.6	114.79	1498.09
66.7	114.81	1509.57
66.8	114.84	1521.05
66.9	114.86	1532.54
67	114.87	1544.03
67.1	114.88	1555.51
67.2	114.89	1567
67.3	114.9	1578.49
67.4	114.91	1589.98
67.5	114.92	1601.47
67.6	114.93	1612.97
67.7	114.94	1624.46
67.8	114.95	1635.96

67.9	114.96	1647.45
68	114.97	1658.95
68.1	114.98	1670.45
68.2	114.99	1681.94
68.3	114.99	1693.44
68.4	115	1704.94
68.5	115.01	1716.44
68.6	115.01	1727.94
68.7	115.01	1739.45